



Gfp

Graphic Finishing
partners

Where Finishing Comes First.

Gfp 563TH-4R MaxPro

ProductionTop Heat Laminator

What's the best way to make your production even better? Shorten film loading time? Make fewer film changes? Increase throughput speed? The 563TH-4R does all that and more.

MAXIMUM PRODUCTIVITY

50% faster throughput

FAST ROLL CHANGES

Front/Rear Swing-out shafts

EASY LOADING

3" Aluminum Quick-Grip shifts

RUGGED DESIGN

Metal Alloy heaters

VERSATILE

Roll-to-Roll operation



overlamination • mounting • board pre-coating

Spend less time on set-ups and changeovers with swing-out supply shafts.

50% faster throughput and quick application changes save time, effort and money.




- Swing-out Quick-Grip supply shafts
- Drop-in Quick-Grip rewind shafts
- Photoelectric eye for safety
- Motorized rear rewind INCLUDED
- Optional rear rewind with slit
- Swing-up feed table & 38" output height
- Metal Alloy heater reduces breakage
- 4.4" diameter rollers
- Roller gap measurement scale



Includes motorized rear
rewind for roll-to-roll
applications (563TH-4R)



Optional Rear Rewind with
Slitter (563TH-4RS)

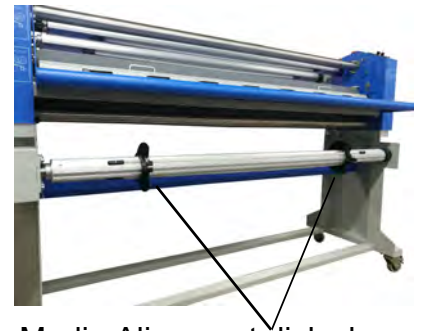

Media Alignment disks keep
supply rolls from telescoping

563TH-4R

Rugged Design
Professional Quality
Proven Performance
Economically Priced

APPLICATIONS

Signs
Banners
POP Displays
Trade show displays
Graphic mounting
Photo mounting
Dry-erase boards
Floor graphics
Window graphics
Vehicle graphics


Warranty:

1 year parts & labor.
Installation is available.

cTUVus
Safety
Approval



Your local dealer is:

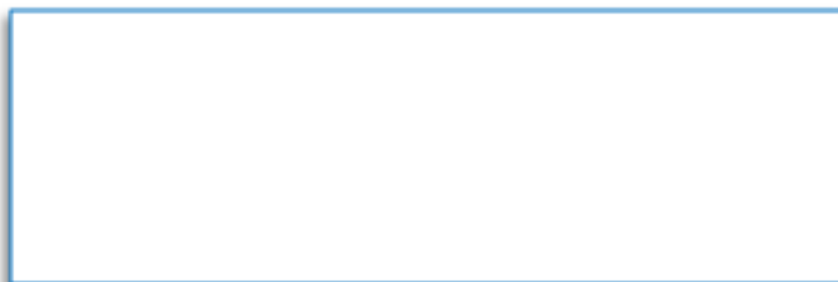

Graphic Finishing Partners LLC P.O. Box 1097 Maryland Heights, MO 63043 www.gfpartnersllc.com

REV 7-1-20

Laminating Width	63"
Roller Diameter	4.4"
Roller Gap	1"
Rear rewind	Included 563TH-4R
Rear rewind with Slitter	Optional 563TH-4RS
Maximum temperature	140°F
Laminating speed	0-20 ft/min
Pressure adjustment	Hand Wheel
Heat method	Metal Alloy heater
Max. roll diameter	8" OD (top); 16" OD (bottom)
Supply Shafts	2 Swing-out
Tension Adjustment	Single knob
Power Supply	110v 12A
Power Consumption	1320W
Foot Pedal	Included
Stand with casters	Included
Net Weight w/ stand	491 lbs.
Dimensions	87" x 26.5" x 52.5"
Machine Shipping	711 lbs. 89" x 35.5" x 31.5"